AERODROME/PARKING/DOCKING CHART - ICAO

ARP 512032N 0012046E

AD ELEV 178FT

MANSTON EGMH

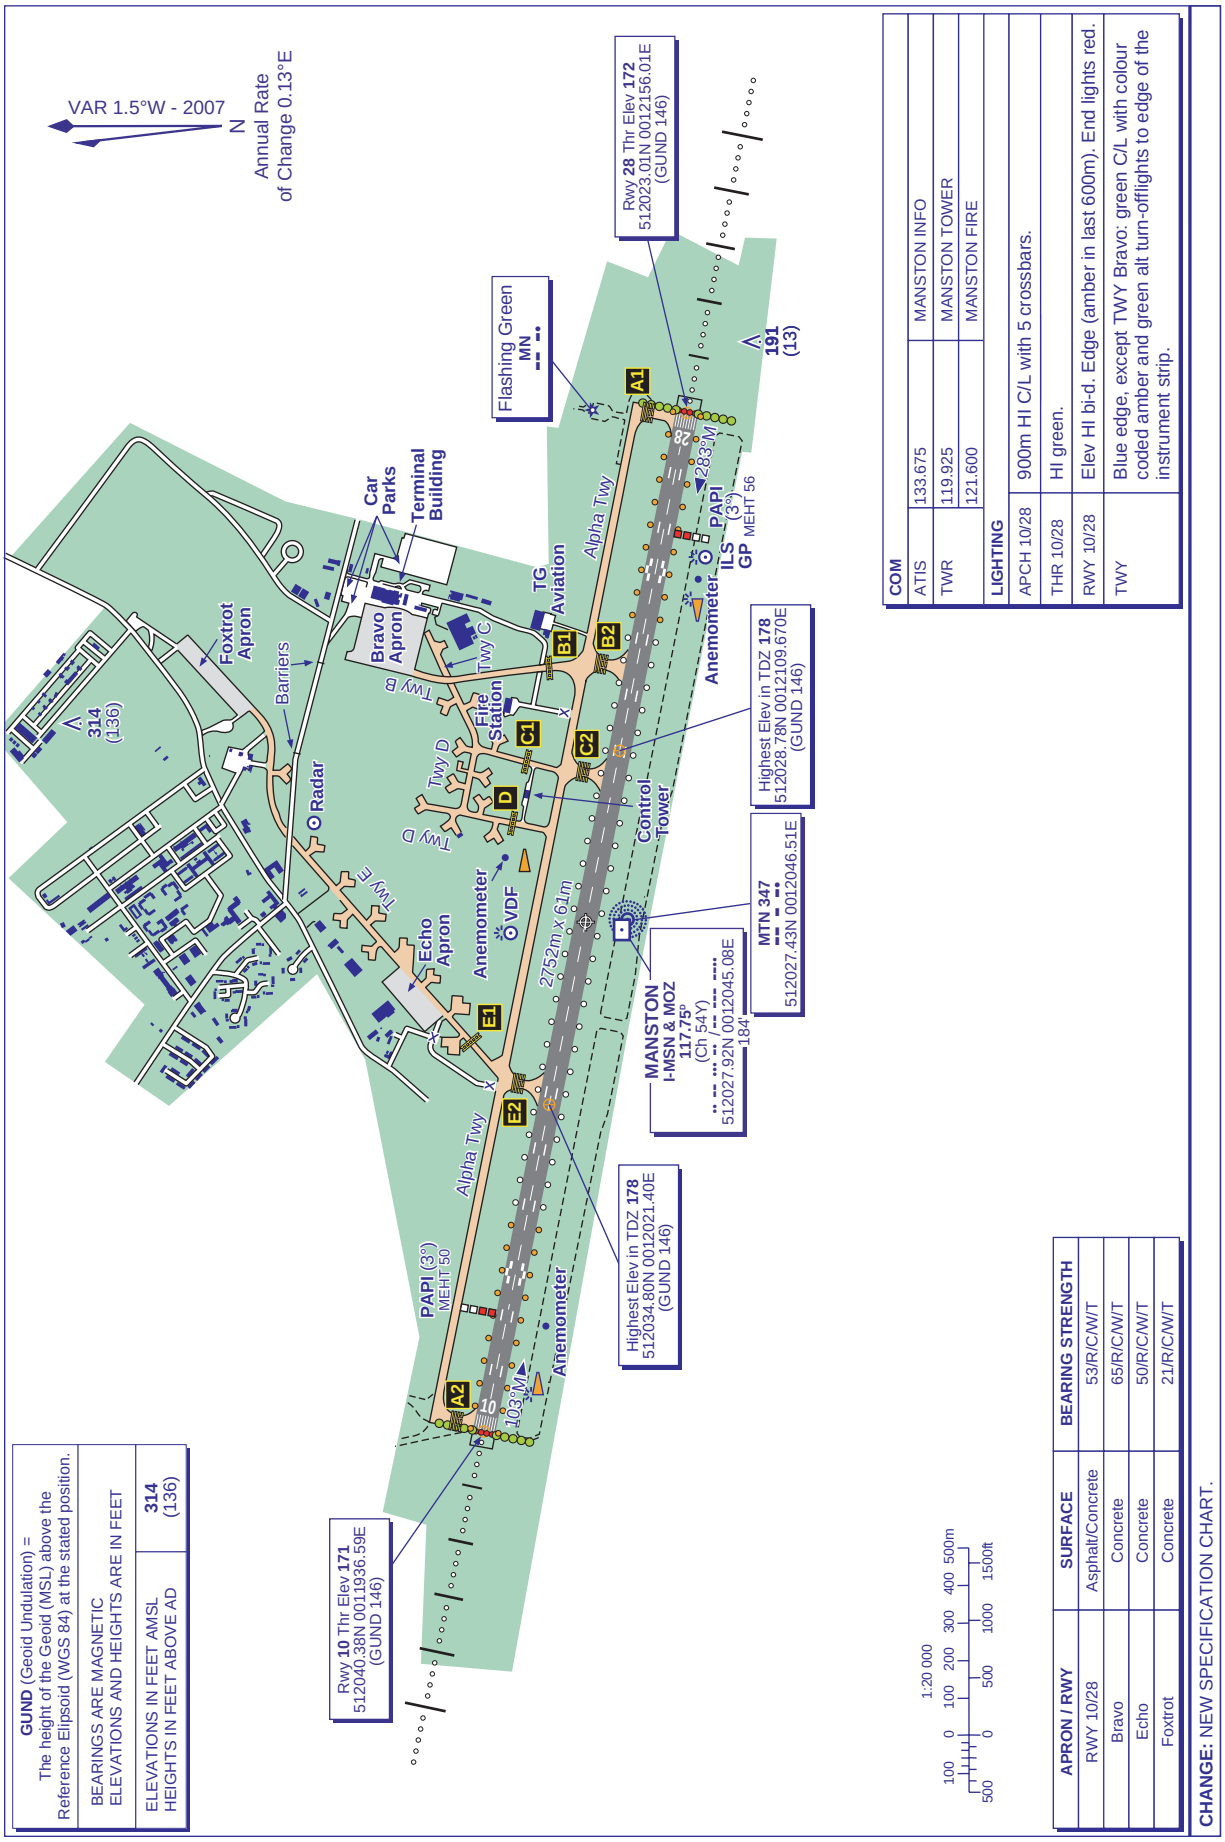

COM		
ATIS	133.675	MANSTON INFO
TWR	119.925	MANSTON TOWER
	121.600	MANSTON FIRE
LIGHTING		
APCH 10/28	900m HI C/L with 5 crossbars.	
THR 10/28	HI green.	
RWY 10/28	Elev HI bi-d. Edge (amber in last 600m). End lights red.	
TWY	Blue edge, except TWY Bravo: green C/L with colour coded amber and green alt turn-offlights to edge of the instrument strip.	

APRON / RWY	SURFACE	BEARING STRENGTH
RWY 10/28	Asphalt/Concrete	53/R/C/W/T
Bravo	Concrete	65/R/C/W/T
Echo	Concrete	50/R/C/W/T
Foxtrot	Concrete	21/R/C/W/T

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Elipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL
HEIGHTS IN FEET ABOVE AD — **314** (136)

CHANGE: NEW SPECIFICATION CHART.

AERO INFO DATE 16 AUG 07